


Check Lamp Hours with a Manager G2




1. Apply power to the T-Max® Mgr G2 and wait until the T-Max® Mgr G2 stops scanning.



2. Press the Start/Stop Button under displays 1 and 10 on the T-Max® Mgr G2 at the same time until the displays change and show zeros in displays 6, 7 and 8. Release the Start/Stop Buttons.

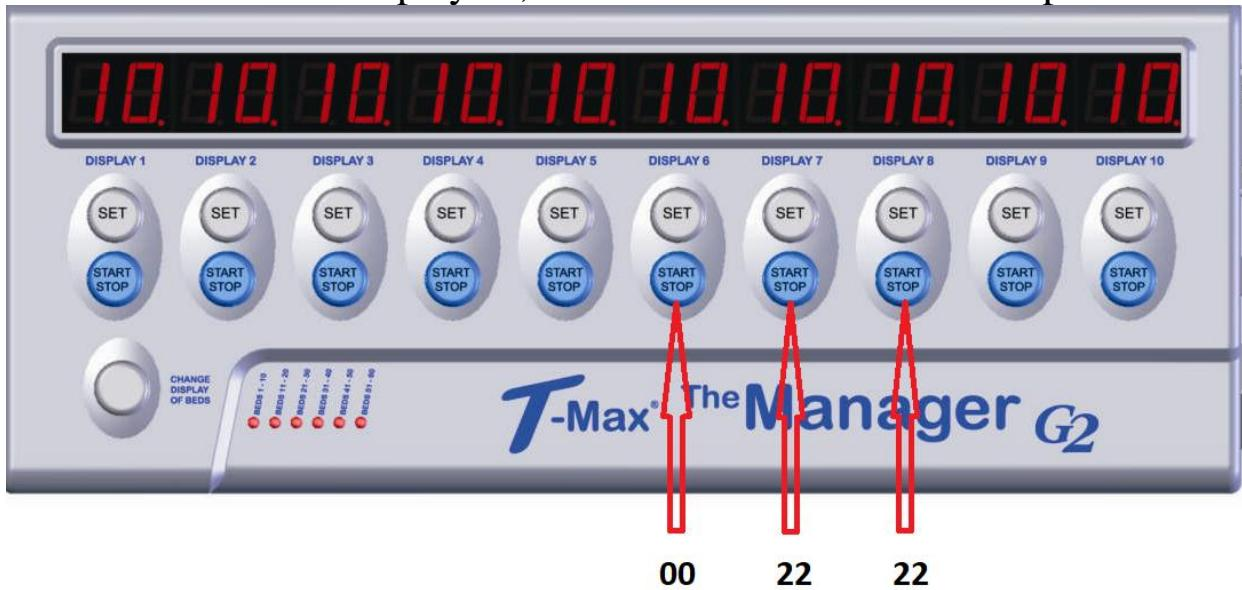


3. Press the Set buttons under displays 6, 7 and 8 until the number for security level 2 is displayed.

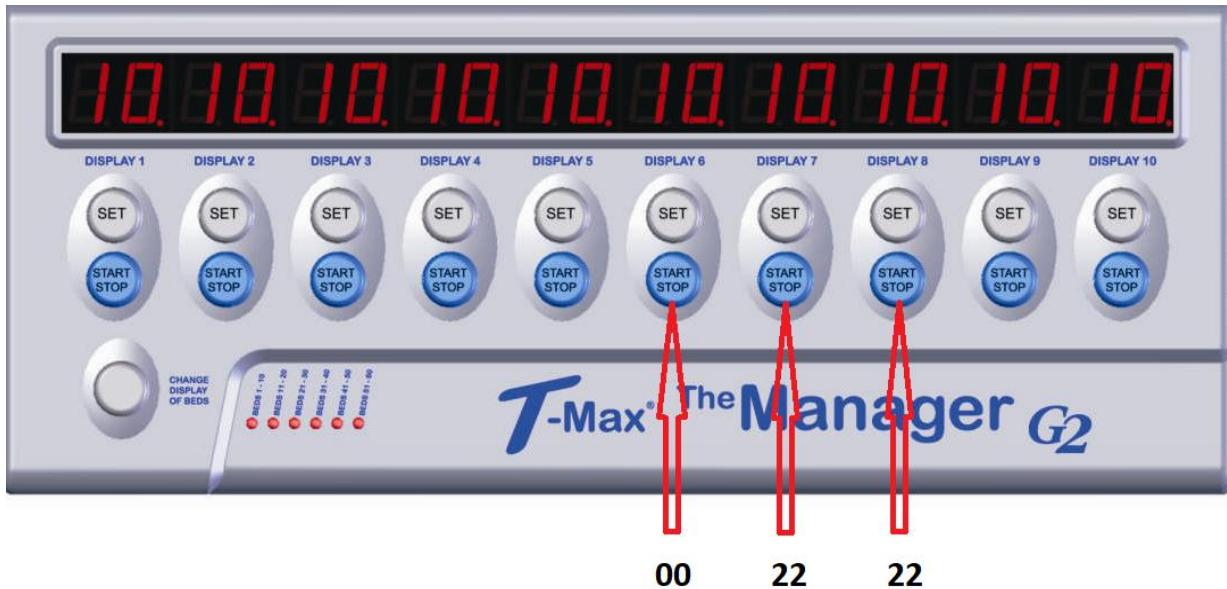


4. Set Password as shown.
5. Once the security number is shown in displays 6, 7 and 8 press the Start/Stop button under display 1.
6. The displays will change to various numbers.



Delay Time	Auto Start	Max Bed Number	Display Mode	Bed # to Change	Parameter# to Change	Parameter Value	Max Slave Manager Address
DISPLAY 1 10	DISPLAY 2 1	DISPLAY 3 64	DISPLAY 4 0	DISPLAY 5 20	DISPLAY 6 5	DISPLAY 7 12	DISPLAY 8 98

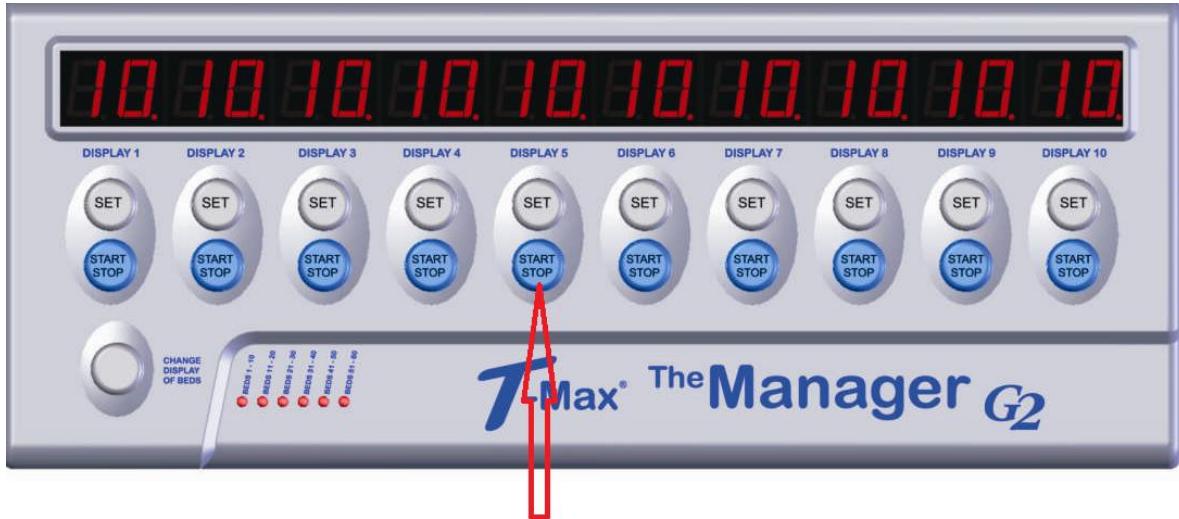


7. Set Display 5 with the SET button to the room number you want to check

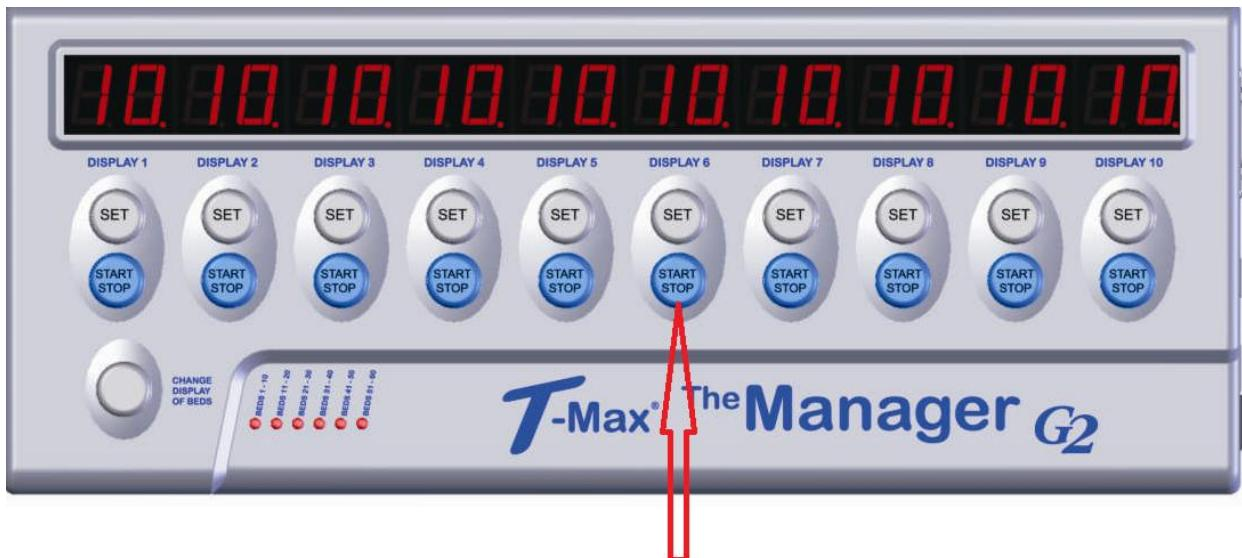


8. Set Display 6 with the SET button to a value of 6 for lamp hours.

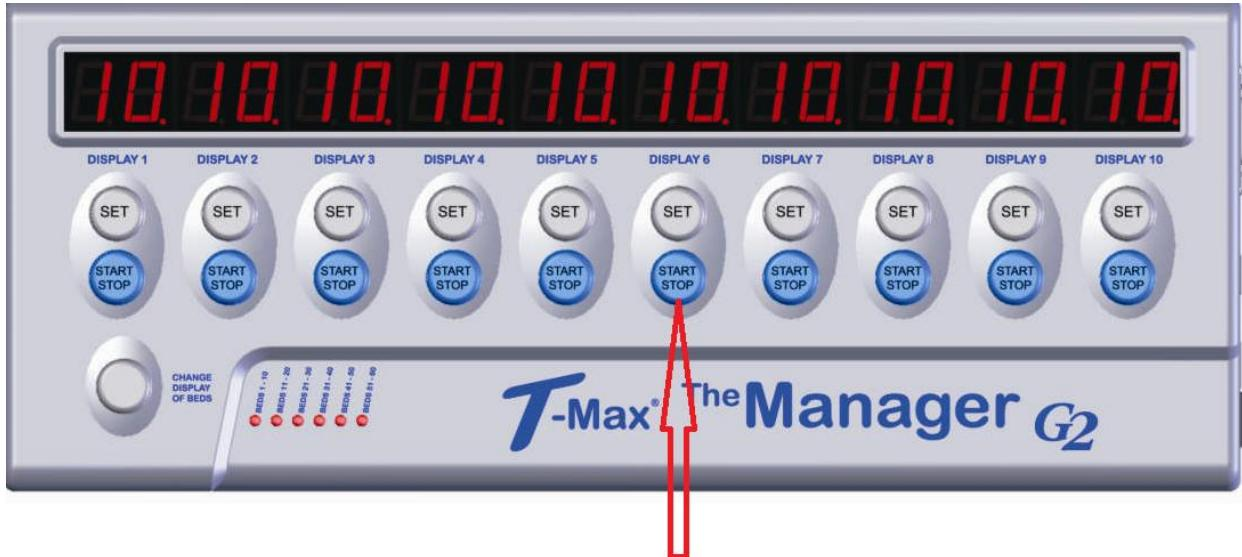

9. Press the START/STOP button Display 6 and the lamp hours will now show in Display 7 and Display 8.

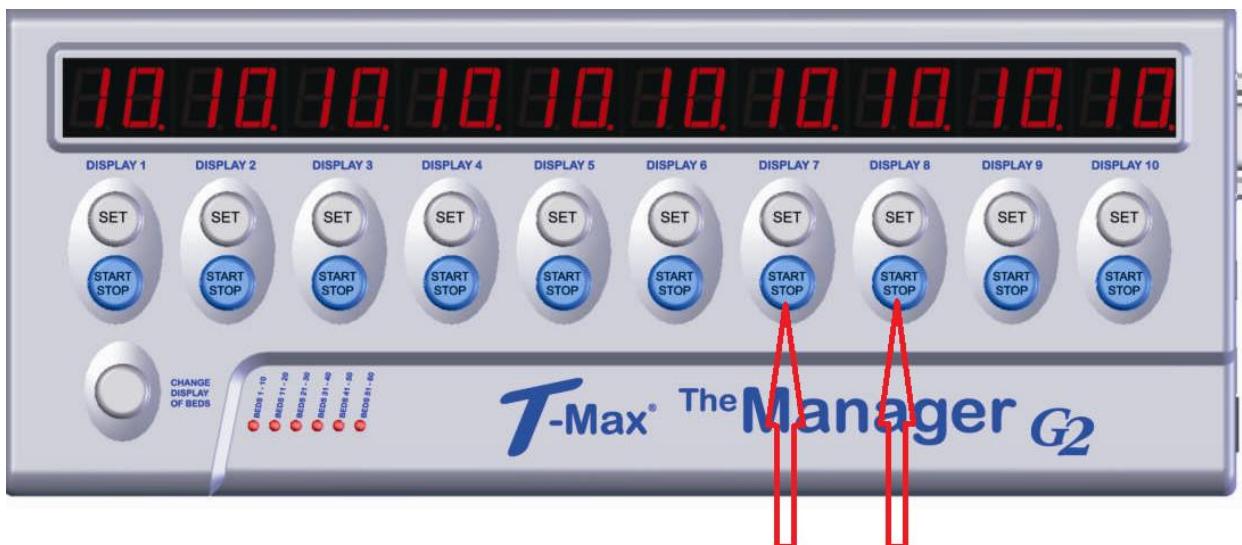


10. Put the four numbers together to read the lamp hours.

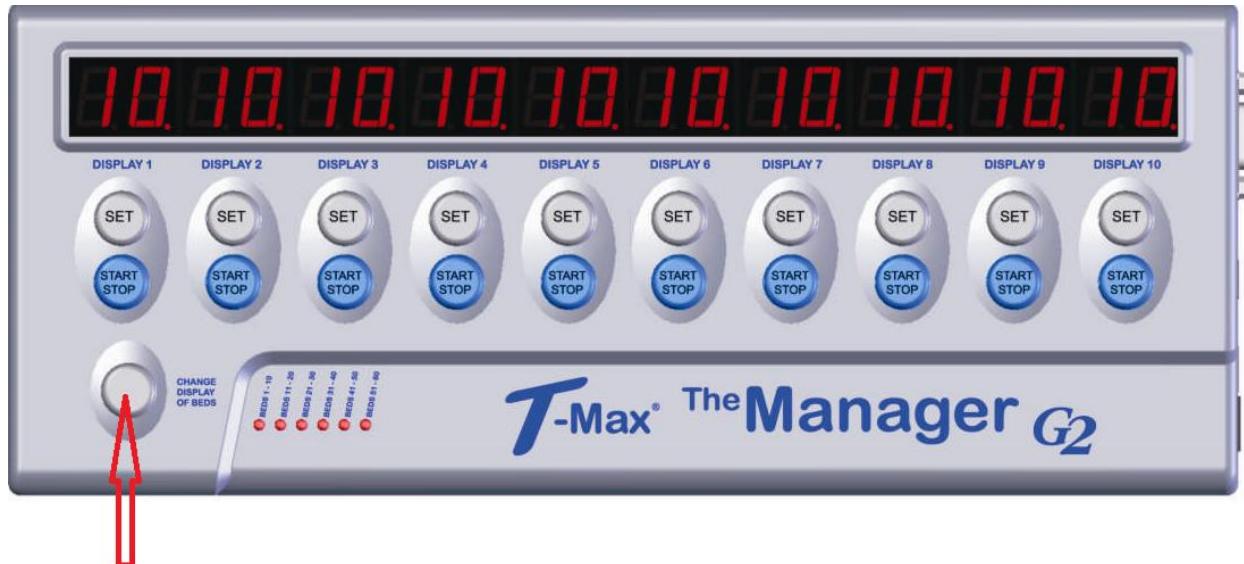

11. Press the “Change Display of Beds” to Exit.



T-Max® Manager G2 Displays in Parameter Mode

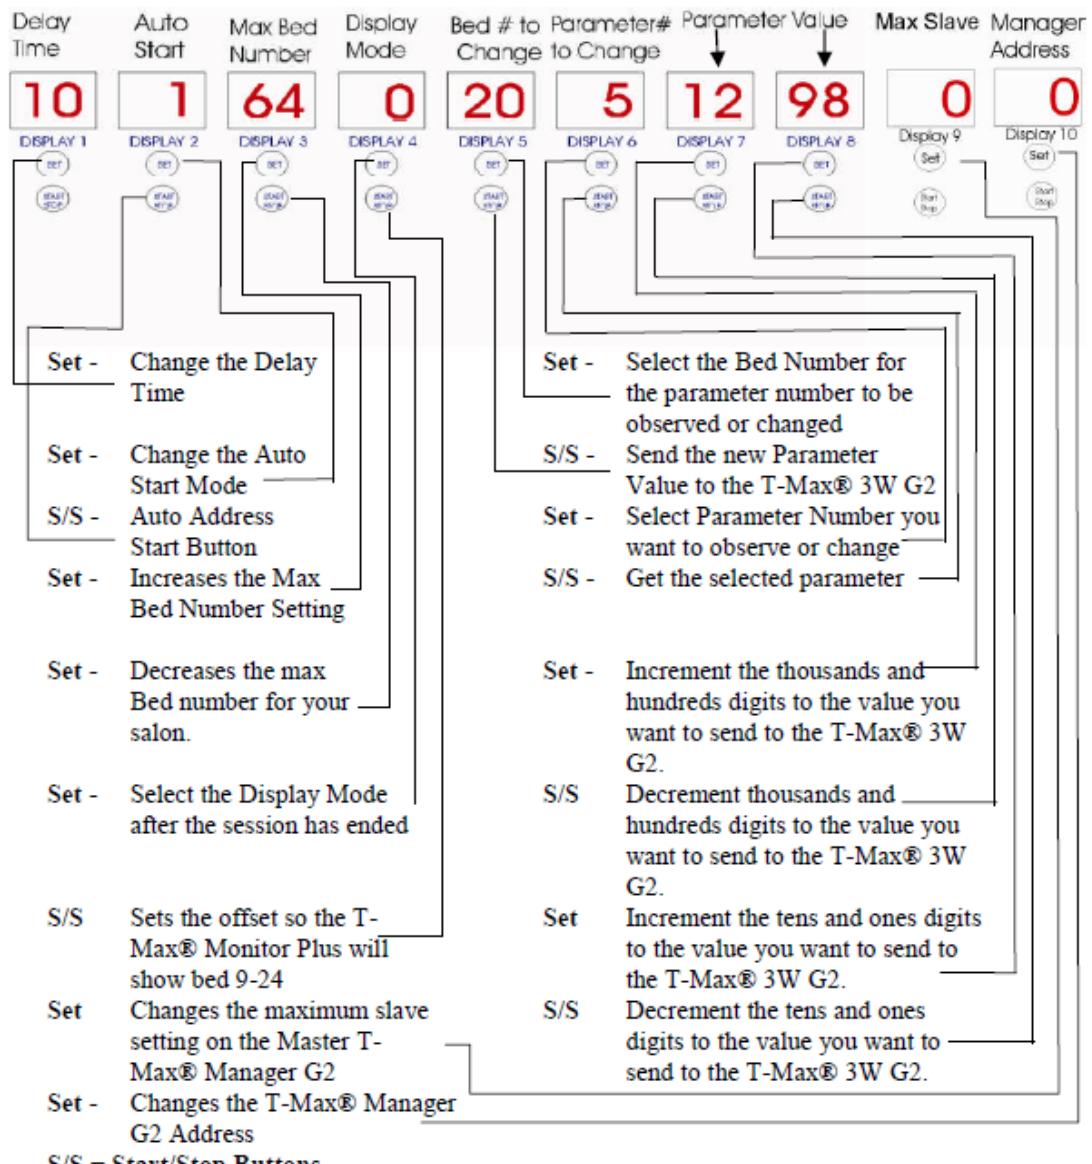

Initial Setup Display Descriptions for Manual Operation Only